



Generations of Craftsmanship

USB Duesen GmbH a family owned, and operated German manufacturing business partnered with Patrick Savio in the United States to form USB-USA LLC. Strategically located in metro Atlanta, GA., USB-USA services municipalities, contractors and distributors across North, South and Central America. USB-USA specializes in providing high-quality stainless-steel sewer and pipe cleaning nozzles with 3D fluid mechanics, Turbo Chain Cutters and accessories.

USB Duesen is ISO 9001:2015 certified and has been manufacturing high-grade stainless-steel sewer cleaning equipment for over 25 years. These valuable years of experience combined with endless field tests, scientific evidence and patented protected ideas produce innovative. long lasting, durable equipment. State-of-the art 5 axil CNC machines are maintained at the highest quality standard to ensure the output is consistent and precise. USB Duesen strives to continually improve and develop their products for success in the field across the globe!



ALL PRODUCTS

Bottom Cleaner



Storm Surge 3D Page 08



Bagger Max 3D Page 09



3D Flounder Nozzle Page 10



Speed Power 3D Page 11



Venturi Nozzle Page 12

Cleaning Nozzles



Cycle Nozzle 3D Page 13



Super Cycle 3D Page 14



Combinator 3D Page 15



Rocket Nozzle® 3D Large Page 16



3D Radial Clean Nozzle Page 17



Tri-Jet 3D Page 18



3D Cleaning Nozzle Page 19



Rocket Nozzle® 3D Small Page 20



Radi 70 3D Page 21



Egg Nozzle 3D Page 22



FS Nozzle 3D Page 23



Super 12 Page 24



Standard Nozzle Page 25



Chisel Nozzle Page 26



Radial Chisel Nozzle Page 27



3D Extreme Page 28



FD2 Nozzle 3D Page 29



660



Digger Nozzle Page 30

Rotating/Vibrating Nozzles



Primus Nozzle I Page 31



Primus Nozzle II Page 31



Primus Nozzle III Page 31



Primus Antiblaster II 3D Page 32



Primus Antiblaster III 3D Page 32



Rotor Nozzle Page 33



Front Push Rotor Page 34



T-Hammer Page 35



V-Hammer Page 36



Baby-Gator Page 37



Mini-Gator Page 37



Gator Page 37

Root Cutters



Mini T-Cutters Page 39



Turbo® \$400 Page 48



Turbikit 3D Page 58



Turbo® 0 Page 40



Turbo® III Page 50



Pipe Wolf Nozzle 3D Page 59



Turbo® I Page 42



Turbo® S200 Page 52



Diamond Face Cutter Page 60



Turbo® II Rigid Page 44



Turbo® S600 Page 54



Rotor Wolf Page 61



Turbo® II Page 46



Turbo® IV Page 56



Beaver Page 62

XL Profile and Inspection Equipment



Radial Flex Skid Page 63



Handy Cart Page 64



Elbow Flex Skid Page 65



NOZZCAM™Inspection Equipment Page 66

Speciality and Oversized Nozzles



Spin-Jet Page 67



Steering Nozzle Page 68



Antiblaster Page 69



Oversized Nozzles Page 70

Accessories



High Pressure Swivel Page 71



Crown Nozzle Page 72



Uni-Flex Skid Page 73



Reducers / Collars Page 74



Tools / Accessories Page 75

Nozzle Inserts















Nozzle Inserts Page 76

APPLICATIONS



Large and Special Profile

Radial Flex Skid	Page 63
Handy Cart	Page 64

Page 65

Page 12

Elbow Flex Skid

Venturi Nozzle

Oversized Nozzles Page 70



Large Debris, Rocks, Mud, Sand, Silt

Storm Surge 3D	Page 08
Bagger Max 3D	Page 09
3D Flounder Nozzle	Page 10
Speed Power 3D	Page 11

Super Cycle 3D Page 14
Cycle Nozzle 3D Page 13
Rocket Nozzle® 3D Page 16
Rocket Nozzle® 3D Page 20



Roots

Baby-Gator	Page 37
Mini-Gator	Page 37
Gator	Page 37

Primus HD Page 31
Turbo® Nozzles Page 40-57
Turbikit 3D Page 58
Pipe Wolf Nozzle 3D Page 59
Rotor Wolf Page 61
Beaver Page 62



Grease, Fats

Primus I	Page 31
Primus II	Page 31
Primus III	Page 31
Primus Antiblaster	Page 32
Baby-Gator	Page 37
Mini-Gator	Page 37
Gator	Page 37

3D Radial Clean Nozzle Page 17 Radi 70 3D Page 21 Radial Chisel Nozzle Page 27

Beaver Page 62



Preventative Maintanance

Primus I	Page 31
Primus II	Page 31
Primus III	Page 31
Primus Antiblaster	Page 32
Rotor Nozzle	Page 33
Baby-Gator	Page 37
Mini-Gator	Page 37
Gator	Page 37
$NOZZCAM^{m}$	Page 66

Cycle Nozzle 3D	Page 13
Super Cycle 3D	Page 14
Combinator 3D	Page 15
Radial Clean 3D	Page 17
Tri-Jet 3D	Page 18
3D Cleaning Nozzle	Page 19
Egg Nozzle 3D	Page 22



Spin-Jet Page 67



FD2 Nozzle 3D Page 29

Half or completely open Drain Pipes



Mineral Deposits, Calcium, Scale

Turbikit 3D Page 58
Diamond Face Cutter Page 60
Turbo® Nozzles Page 40-57

T-Hammer Page 35 V-Hammer Page 36



Protruding Laterals or Pipes

Turbo® Nozzles w/ barrel cutter Page 46-57



Toilet safe

Antiblaster

Page 69

STORM SURGE 3D

















P/N	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
3006	3/4" - 1"	30	12" - 15"	20.80" x 8.10"	39	6			3
3008	1"-1¼"	40	15" - 30"	20.80" x 9.00"	49	8			3
3010	1"-1¼"	60	18" - 40"	20.80" x 11.3"	59	10			3
3012	1″-1¼″	80	20" - 80"	20.80" x 11.8"	64	12			3
3014	1"-1¼"	80	20" - 96"	20.80" x 11.8"	68	14			3

Outstanding excavation, traction and transportation

A highly efficient floor cleaner made of hardened stainless steel, the Storm Surge 3D nozzle has a built-in power manifold with fixed jets and 3D fluid mechanics that produce an intense and forceful jet pattern resulting in outstanding excavation, traction and transportation of material—even under water! Roll-over bars enable this nozzle to return to its correct position every time. One-piece ceramic inserts and a high-pressure swivel come standard on this nozzle.

BAGGER MAX 3D
















1010









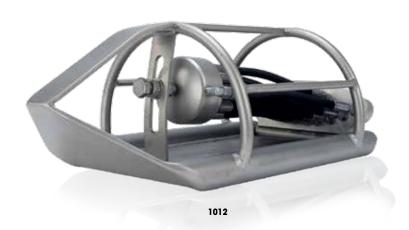

	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
1010	1½"	120	40" - 196"	32.28" x 17.32"	167	14			3
1012	1", 1¼"	80	32" - 120"	30.00" x 12.00"	115	12			3
1013	1", 1¼"	80	24" - 72"	22.80" x 10.00"	79	10			3
1015]"	40	15" - 48"	19.68" x 8.66"	53	8			3
1017]"	40	10" - 30"	15.74" x 7.87"	46	6			3
1018	3/4"	35	10" - 30"	15.74" x 7.87"	33	6			3

Forceful jet pattern and adjustable nozzle block

A high efficiency floor cleaner made of hardened stainless steel, the **Bagger Max 3D** nozzle includes an adjustable nozzle block that can be positioned vertically between 0° - 30° depending on your application. The power manifold has built in 3D fluid mechanics that produce an intense and forceful jet pattern resulting in outstanding excavation, traction and transportation of material—even under water! Roll over bars enable this nozzle to return to is correct position every time. One-piece ceramic inserts and a high-pressure swivel come standard on this nozzle.

FLOUNDER 3D
























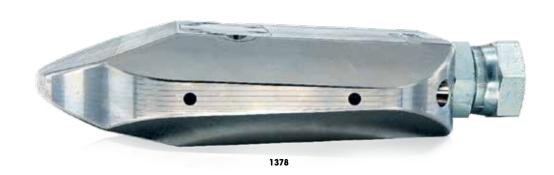

	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
1377	1", 1¼"	80	15" - 60"	10.62" x 7.08"	37,47	10			3
1378]"	50	12" - 40"	8.66" x 5.90"	20,94	8			3
1380	3/4"	30	10" - 24"	7.08" x 3.93"	9,5	6			3
1381	1/2"	12	4" - 12"	5.90" x 3.54"	6,61	4			3
1382	3/8"	6	2" - 4"	3.93" x 2.75"	2,2	4			3

Ideal for cleaning sand, mud and gravel

Flat, compact, heavy and wedge-shaped, the **Flounder 3D** nozzle is ideal for cleaning sand, dirt, mud, gravel and other material at the bottom of the pipe. The overall design, in combination with the 3D fluid mechanics, makes the cleaning process fast and effective.

SPEED POWER 3D





	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
1030	1", 1¼"	80	15" - 60"	19.68" x 7.87"	106	8			3
1035	1", 1¼"	80	12" - 40"	16.53" x 6.29"	66	8			3
1038	1"	60	10" - 32"	13.77" x 5.51"	49	6			3

Perfect for oval and egg-shaped pipes

The **Speed Power 3D** is a heavy spherical and ellipsoid-shaped high-efficiency floor cleaner for oval or egg-shaped pipes. The 3D fluid mechanics create a powerful jet pattern that is mainly directed towards the pipe bottom to move heavy debris. The nozzle is constructed of hardened stainless steel and comes standard with one-piece ceramic inserts and a high-pressure swivel.

VENTURI NOZZLE

















	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
2704	1", 1¼"	80	48" and 120"	27.16" x 15.74"	101,41	2			2
2702	1", 1¼"	80	32" - 60"	27.55" x 15.74"	92,59	1			2
2700	1"	60	32" - 48"	25.59" x 11.81"	59,52	1			2

Clean large sewer pipes with continuous flow

USB-USA has designed a specialized nozzle to clean large sewer pipes with continuous flow. The **Venturi Nozzle** creates a constriction within the pipe that varies the flow of fluids (the Venturi effect), enabling it to clean and move large volumes of sand, mud, sludge, gravel and other debris out of the pipe. The Venturi nozzle comes standard with a high-pressure swivel. Available in two models.

NOTE: The nozzle must be completely submerged in water when operating.

CYCLE NOZZLE 3D





	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
3001	3/4"	50	8" - 20"	7.00" x 3.8"	11	8			3
3002]"	60	8" - 20"	7.00" x 3.8"	11	8			3
3003	1 ¼"	80	8" - 20"	7.00" x 3.8"	11	8			3

Spray angles for pipe cleaning and maintenance (12°/20°)

Produced from hardened stainless steel, the **Cycle Nozzle 3D** includes 3D fluid mechanics and two different rear spray angles of 12°/20°. These spray angles are ideal for general pipe cleaning and preventative maintenance work. This nozzle comes standard with one-piece ceramic inserts.

SUPER CYCLE NOZZLE 3D














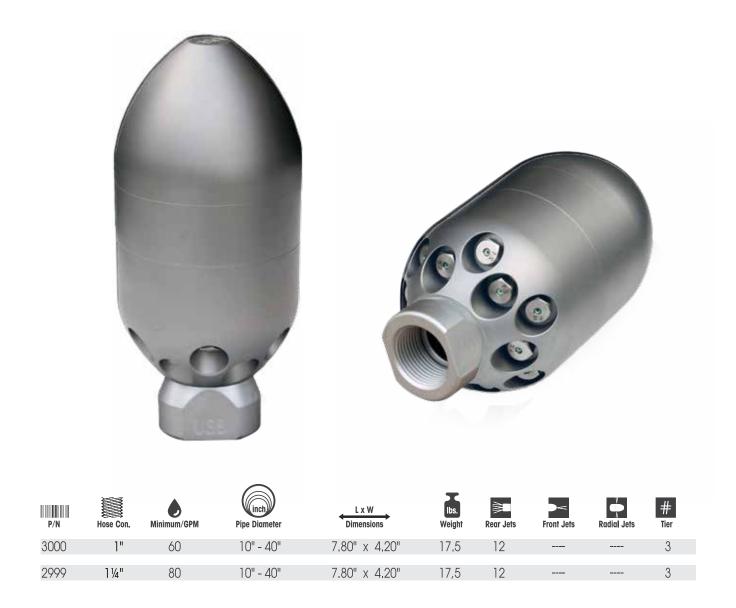

12 rear jets ideal for large pipes

The **Super Cycle Nozzle 3D** is a large, heavy-weight nozzle constructed from hardened stainless steel with 12 rear jets. Set at spray angles of 12° and 28°, the rear jets make this nozzle ideal for cleaning sewer, storm or other large pipes. Its powerful jet pattern and 3D fluid mechanics are excellent for flushing dirt from roots before cutting or general cleaning. This nozzle comes standard with one-piece ceramic inserts.

COMBINATOR 3D

















	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
1182	1", 1¼"	80	15" - 48"	7.87" x 4.72"	23,14	12			3
1186]"	60	10" - 32"	7.08" x 4.33"	17,63	10			3
1187	1"	60	8" - 20"	6.10" x 3.93"	12,12	8			3
1188	3/4"	35	8" - 20"	6.10" x 3.93"	12.12	8			3

Spray angles for pipe cleaning and maintenance (15°/25°)

The **Combinator 3D** nozzle is produced from hardened stainless steel and includes 3D fluid mechanics and two different rear spray angles of 15°/25°. These spray angles are ideal for general pipe cleaning and preventative maintenance work. This nozzle comes standard with one-piece ceramic inserts.

ROCKET NOZZLE® 3D

















	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
1152	1 1/2"	110	16" - 48"	10.23" x 6.29"	44,09	12			3
1154	1", 1¼"	80	12" - 32"	7.87" x 4.72"	20,94	10			3
1156	1"	60	10" - 24"	7.08" x 4.33"	17,63	8			3
1157	1"	60	8" - 20"	6.10" x 3.93"	11,46	8			3
1158	3/4"	35	8" - 15"	6.10" x 3.93"	11,46	8			3

Rocket-like power!

The tight spray angle of 7° combined with one piece-ceramic inserts and 3D fluid mechanics produce incredible results. Constructed from hardened stainless steel, the **Rocket Nozzle® 3D** has a powerful jet pattern can flush dirt, mud, rocks and other large or heavy material found in sewer or storm pipes.

3D RADIAL CLEAN NOZZLE















	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
1191	1½"	110	12" - 24"	12.40" x 7.48"	79,36	6		12	3
1190	1", 1¼"	80	10" - 20"	7.87" x 4.72"	20,94	5		10	3
1194	1"	60	8" - 15"	6.10" x 3.93"	12,12	6		6	3
1195	3/4"	30	6" - 12"	4.92" x 3.14"	6,17	5		5	3

Powerful spray pattern leaves no streaks behind

Streaks are a thing of the past with the 3D Radial Clean Nozzle! 3D fluid mechanics deliver smooth water to the rear 45° fan jets, creating a powerful 360° spray pattern capable of removing grease, scale, dirt and sand from pipe walls without leaving streaks behind. The additional rear 15° propulsion jets move the nozzle up the line and help transport material back to the manhole. This high-performing nozzle is perfect before CCTV inspection.

TRI-JET 3D





	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
1225	1 1/2"	110	16" - 48"	10.23" x 6.29"	44,09	15			3
1220	1", 1¼"	80	12" - 40"	7.87" x 4.72"	23,14	15			3
1218]"	80	10" - 32"	7.08" x 4.33"	17,63	15			3
1213]"	60	8" - 20"	6.10" x 3.93"	12,12	12			3
1213AL	1″	60	8" - 20"	6.10" x 3.93"	6,00	12			3
1210	3/4″	50	4" - 12"	4.92" x 2.75"	4,85	12			3

A high-performance nozzle with options

The **Tri-Jet 3D**, available in aluminum or stainless steel, makes use of three different optimal rear spray angles, 7°/14°/21°. As an option, one of the spray angles can be blocked off all the way around the nozzle to focus the cleaning process on pulling, flushing or cleaning with the remaining two spray angles. This nozzle comes standard with one-piece ceramic inserts.

3D CLEANING NOZZLE






















	Hose Con.	Minimum/GPM	inch) Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
1052	1"	60	8" - 24"	7.08" x 3.14"	8,81	10	1		3
1055]"	60	8" - 24"	4.72" x 3.14"	6,17	10	1		3
1060]"	50	6" - 15"	4.92" x 2.75"	4,85	8	1		3
1063	3/4"	30	6" - 10"	4.13" x 2.75"	3,96	8	1		3
1070	3/4"	30	6" - 10"	3.74" x 2.36"	2,64	8	1		3
1062	1/2"	18	4" - 8"	4.13" x 2.75"	3,96	6	1		3
1071	1/2"	18	4" - 8"	3.74" x 2.36"	2,64	6	1		3
1075	1/2"	12	4" - 8"	2.36" x 1.57"	0,66	6	1		3

Rear-spraying angles and a forward-spraying jet

Hardened stainless steel construction with 3D fluid mechanics and two different rear-spraying angles of 15°/25° make this **3D Cleaning Nozzle** ideal for general pipe cleaning and preventative maintenance work. A forward-spraying jet is also included. This nozzle comes standard with one-piece ceramic inserts.

ROCKET NOZZLE® 3D



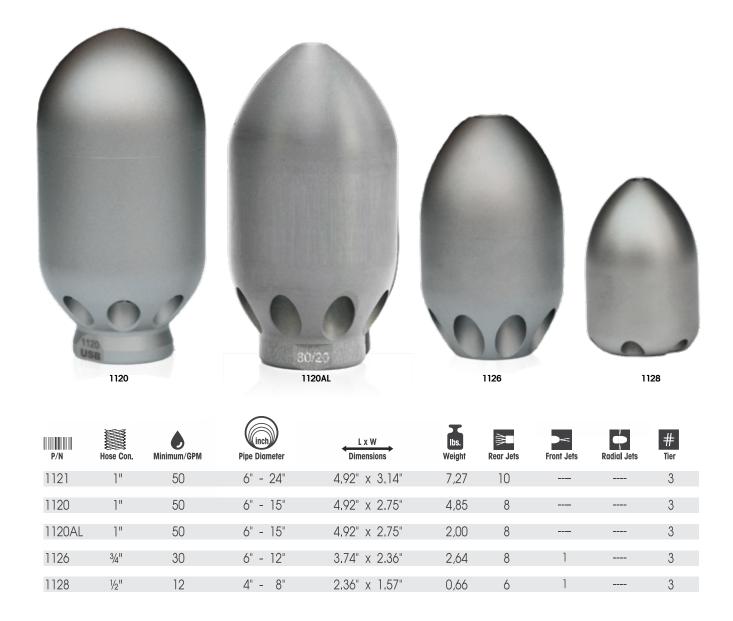

Small but powerful

The **Rocket Nozzle® 3D** has a tight spray angle of 7°. This combined with the one piece-ceramic inserts and 3D fluid mechanics, produces incredible pulling power. Constructed from hardened stainless steel, the powerful jet pattern can flush dirt, mud, rocks and any other large heavy material you may find in sewer or storm pipes. "The 1" Rocket Nozzle® is also available in aluminum for hilly difficult terrain".

RADI 70 3D















	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
1112	1"	80	10" - 32"	7.08" x 3.14"	9,70	10	1	10	3
1114]"	60	6" - 24"	5.11" x 2.75"	4,85	8	1	8	3
1115	3/4"	30	6" - 12"	3.74" x 2.36"	2,64	8	1	8	3
1117	1/2"	18	4" - 8"	2.36" x 1.57"	0.66	6	1	6	3

Multiple spray angles blast materials away

3D fluid mechanics and multiple spray angles, including jets that are 70° perpendicular to the interior wall of the pipe, enable the RADI 70 3D to blast material off the pipe wall. The two remaining two spray angles of 15°/25° effectively propel the nozzle and clean the pipe. This nozzle comes standard with one-piece ceramic inserts.

EGG NOZZLE 3D





	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
1081]"	50	6" - 12"	4.13" x 2.75"	3,74	8	1		3
1082	3/4"	30	6" - 10"	2.75" x 1.96"	1,76	8	1		3
1083	1/2"	12	4" - 8"	2.16" x 1.57"	0,44	6	1		3
1084	3/8"	8	4" - 6"	1.96" x 1.37"	<0.44	5	1		2
1085	1/4"	6	2" - 4"	1.57" x 1.18"	<0.44	6	1		2
1086	1/8"	3	2" - 4"	0.78" x 0.62"	<0.44	3	1		1
1087	1/8"	3	2" - 4"	0.78" x 0.62"	<0.44	3	1		1

Designed for easy mobility and powerful cleaning

With its contoured egg-shaped design and 20° rear propulsion jets, the **Egg Nozzle 3D** is designed to slide easily down the pipe. 3D fluid mechanics and one-piece ceramic inserts deliver water that efficiently and effectively cleans while propelling the nozzle.

FS NOZZLE 3D





	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
1172	1"	60	6" - 15"	4.13" x 2.75"	3,74	8	4		3
1173	3/4"	30	6" - 12"	2.95" x 1.96"	1,54	8	4		3
1174	1/2"	14	4" - 8"	2.36" x 1.57"	0,66	6	4		3
1175	3/8"	8	2" - 4"	1.96" x 1.37"	0,44	5	4		2
1176	1/4"	6	2" - 4"	1.57" x 1.18"	0,22	6	4		2

A penetrating nozzle that opens tough blockages and slides with ease

Designed to penetrate pipes with tough blockages, the **FS Nozzle 3D** is made from hardened stainless steel and features 3D fluid mechanics and four forward-facing one-piece ceramic inserts at 0° /15°. The 20° rear propulsion jets combined with the smooth egg shape enables the nozzle to slide easily down the pipe.

SUPER 12





	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier	
1205	1/2"	14	2" - 4"	1.96" x 1.18"	<1.0	12	1		2	

A small nozzle that packs a punch—and navigates tight corners

Don't be fooled by its small size, the **Super 12** gets the job done. The 12 rear propulsion jets are more than any other ½" nozzle in our inventory. And the 15° spray angle makes this nozzle ideal for use around tight corners.

STANDARD NOZZLE





	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
1251	1¼"	80	8" - 12"	3.14" x 2.36"	2,2	10	1		2
1256]"	50	6" - 12"	3.14" x 2.16"	1,76	10	1		2
1255]"	50	6" - 12"	2.04" x 2.28"	1,5	12	4		2
1257	3/4"	30	6" - 8"	2.55" x 1.69"	0,88	8	1		2
1259	3/4"	30	6" - 8"	2.55" x 1.69"	0,88	6	1		2
1260	1/2"	12	4" - 6"	1.18" x 1.96"	0,22	6	1		1
1262	1/2"	12	2" - 6"	1.06" x 1.25"	0,22	6	1		2
1268	3/8"	8	2" - 4"	1.37" x 0.98"	<0.22	6	1		1
1273	1/4"	3	up to 4"	0.78" x 0.78"	<0.22	6	1		1
1274	1/4"	3	up to 4"	0.78" x 0.78"	<0.22	6			1

A nozzle that sets new standards for cleaning smaller pipes

Compact, lightweight and inexpensive are three words that sum up the **Standard Nozzle**. Made from hardened stainless steel with a rear spray angle of 20°, this nozzle is perfect for cleaning smaller pipes. A front jet for penetration is also available.

CHISEL NOZZLE























	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
1316	11/4"	100	8" - 24"	7.08" x 3.34"	9,70	6	5		2
1317	11/4"	80	8" - 20"	6.29" x 2.95"	5,51	6	5		2
1318]"	60	8" - 20"	6.29" x 2.95"	5,51	6	5		2
1319	11/4"	80	8" - 20"	3.93" x 2.36"	1,76	10	4		2
1320]"	60	8" - 15"	3.74" x 2.36"	1,50	8	4		2
1323	3/4"	30	6" - 12"	2.95" x 1.96"	0,66	6	4		2
1326	1/2"	12	4" - 8"	2.36" x 1.18"	0,33	6	4		1
1328	3/8"	12	2" - 4"	1.57" x 0.98"	<0.22	6	4		1
1330	1/4"	6	2" - 4"	1.18" x 0.78"	<0.22	6	4		1
1331	1/4"	4	2" - 4"	1.18" x 0.78"	<0.22	3	4		1

Reliable, powerful and effective at tough blockages

The **Chisel Nozzle** is a reliable sewer cleaning nozzle that is a must have! Sharp edges and multiple forward jets deliver powerful penetration to effectively open tough total blockages. A drill point can be added to the front of the Chisel as well.

RADIAL CHISEL NOZZLE







	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
1313]"	80	8" - 20"	6.29" x 2.95"	5,51	6	5	6	2
1314	3/4"	30	6" - 12"	4.13" x 2.36"	2,42	6	5	6	2

Greater penetrating power that restores flow

The **Radial Chisel Nozzle** uses sharp edges, multiple forward-penetrating jets and radial spray jets at 70° to break up blockages from within. This nozzle is designed for ultimate penetrating power.

3D EXTREME



















	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
1136]"	60	6" - 15"	8.74" x 2.75"	9,47	8	1		3
1136.75	3/4"	30	6" - 15"	8,74" x 2,75"	9,47	8	1		3

Exceptional cleaning and pulling power

Ideal for pipes that may have holes in the bottom or offsets, the **3D Extreme** nozzle is a worthy tool to have in your tool box. 3D fluid mechanics and one-piece ceramic inserts create a strong jet pattern with a spray angle of 11°, resulting in exceptional cleaning and pulling power. One forward jet offers a penetration option as well.

FD2 NOZZLE 3D







	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
1278] 1/4"	100	12"	7.87" x 3.54"	14,33	8			3
1279	1"	80	12"	7.87" x 3.54"	14,33	8			3
1280	1"	60	8"	6.29" x 2.95"	8,37	8			3
1282	3/4"	30	6"	5.51" x 2.36"	3,96	8			3
1290	1/2"	12	4"	4.72" x 1.96"	2,64	6			3

Power meets control

The **FD2 Nozzle 3D** was designed to clean half open or completely open drain pipes! The hardened stainless steel nozzle includes 3D fluid mechanics that provide excellent cleaning and pulling power. At the same time, the one-piece ceramic inserts spray at an angle of 2°, preventing the water from splashing upwards out of the channel.

DIGGER NOZZLE®













	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
1140	1/2"	12	2" - 8"	1.57" x 1.18"	0,22		7		2
1142	1/4"	6	Up to 3"	1.18" × 0 .78"	<0.22		7		2
1144	Digge	r Nozzle Holde	r	0.98" x 1.96"	0,22				N/A

A front-focused nozzle

Used as is or together with a special push rod attachment, the **Digger Nozzle®** is strictly made for pushing material out of small pipes. The absence of rear jets focus all the water to the front of the nozzle, enabling it to clean effectively.

PRIMUS



















PRIMUS I

	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
5005	1/2"	12	4" - 8"	5.36" x 2.36"	3	3	1	4	3

PRIMUS II

	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
5010	3/4"	30	6" - 10"	9" x 4.72"	8	5	1	4	3
5013	1"	60	6" - 15"	9" x 4.72"	8	5	1	4	3

PRIMUS III

	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier	
5020	1", 1¼"	80	12" - 24"	11.63" x 5.90"	20,94	5	1	4	3	

A user-friendly, innovative nozzle that flushes out debris

Designed for controlled rotation and use with recycled water, the innovative **Primus** requires no lubrication or replacement of internal parts for at least one year. The nozzle is built from hardened stainless steel. A rotating head removes grease, light scale and roots. And the 3D fluid mechanics in the propulsion unit flush out debris, providing outstanding results.

PRIMUS ANTIBLASTER 3D















PRIMUS ANTIBLASTER II 3D

	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
5017	3/4"	30	6" - 10"	9" x 4.72"	8	5	1	4	3
5018	1"	60	6" - 15"	9" x 4.72"	8	5	1	4	3

PRIMUS ANTIBLASTER III 3D

	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier	
5019	1, 1¼"	80	12" - 24"	11.63" x 5.9"	20,94	5	1	4	3	

Controlled rotation for shallow sewer lines

Designed to reduce the chances of blowing toilets, the Primus Antiblaster 3D nozzle is a controlled rotating nozzle that is also low maintenance. The nozzle is built from hardened stainless steel and requires no maintenance or replacement of internal parts for at least one year. A rotating head removes grease, light scale and roots while the wide 42° rear spray angles in the propulsion unit clean / flush out debris.

ROTOR NOZZLES















	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
1345	1¼"	100	10" - 20"	7.08 x 3.54"	14,1	6		3	2
1350]"	80	6" - 15"	5.51" x 3.14"	9,25	6		3	2
1351]"	40	6" - 12"	4.13" x 2.36"	3,30	6		3	2
1352	3/4"	30	6" - 10"	3.74" x 1.96"	3,30	6		3	2
1357	1/2"	12	4" - 8"	2.95" x 1.57"	1,10	3		3	2
1360	3/8"	6	2" - 6"	2.16" x 1.18"	0,66	3		3	2
1362	1/4"	6	2" - 6"	2.16" x 1.18"	0,66	3		3	2
1364	1/4"	6	Up to 4"	1.57" x 0.78"	0,33	3			1
1365	1/8"	3	Up to 4"	1,33" x 0,62"	0,22	3			1

Multi-angled inserts and rear propulsion jets remove and flush debris

Rotor Nozzles feature three one-piece ceramic inserts in the middle rotating section with spray angles of 90° /75° /60°, effectively removing grease, dirt and light roots from pipes. Rear propulsion jets help flush the debris. Constructed of hardened stainless steel, the nozzles include non-corrosive, low-maintenance rotating centers.

FRONT PUSH ROTOR







1309 | 1310

	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
1308	1/2"	14	4" - 8"	2.75" x 1.57"	0,88	3	4	3	2
1309	3/8"	8	up to 6"	2.16" x 1.18"	0,66	3	4	3	2
1310	1/4"	8	up to 6"	2.16" x 1.18"	0,66	3	4	3	2

A front-pushing nozzle designed for laterals and small pipes

The stainless steel **Front Push Rotor** nozzle is designed for effective cleaning of laterals and other small pipes. Rear jets propel the nozzle in the pipe, front rotating jets move material forward and additional rotating radial jets thoroughly clean the interior circumference of the pipe.

T-HAMMER





	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
1333	1¼"	100	10" - 24"	10.23" x 5.19"	33,06	6	3	3	2
1334	1, 1¼"	80	8" - 20"	7.08" x 3.54"	14,33	6	3	3	2
1335	1	80	6" - 15"	5.51" x 3.14"	8,81	6	3	3	2

Controlled force for plastic pipes

The **T-Hammer**'s middle rotor section generates vibration in plastic pipes to break up deposits and other hard materials. Turbine technology controls the agitation. This stainless steel nozzle can be used with recycled water and comes standard with one-piece ceramic inserts.

WARNING: Use in thick plastic pipes only!! NEVER use in clay, concrete or thin plastic pipes

V-HAMMER

















	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
1337	1"	40	6" - 12"	4.13" x 2.36"	3,08	6		3	2
1338	3/4"	30	6" - 10"	3.62" x 1.96"	1,76	6		3	2
1339	1/2"	12	4" - 8"	2.75" x 1.57"	1,32	3		3	2
1340	3/8"	6	up to 4"	2.16" x 1.18"	0,33	3		3	3
1341	1/4"	6	up to 4"	2.16" x 1.18"	0,33	3		3	2
1342	1/4"	6	up to 4"	1.92" x .78"	0,33	3			1
1343	16."	6	up to 4"	1.37" x .62"	0,25	3			1

Powerful impact for plastic pipes

The **V-Hammer**'s middle rotor section generates vibration in plastic pipes to break up deposits and other hard materials that can then be flushed out. Less aggressive options for the top cap section are also available.

WARNING: Use in thick plastic pipes only!! NEVER use in clay, concrete or thin plastic pipes.

GATOR NOZZLES

















	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	O Head	# Tier
5015*	3/8"	9	3" - 8"	3.75 x 1.25"	.975		1	4	3
5022	3/8 - 1/2"	9	3" - 8"	4.33 x 1.57"	1.32		1	4	3
5030	3/4 - 1"	50	6" - 24"	8.66" x 4.52"	14.33		1	4	3

High Performance Rotating Nozzle

The **Gator** nozzles cut and remove roots, grease, blockages, and scale in various pipes: **Baby-Gator** and **Mini-Gator** ranging from 3" – 8" and **Gator** ranging from 6" – 24". Encased in a compact stainless-steel body the strong reinforced internal design rotates the head. 3D fluid mechanics in the head smoothly direct all the incoming high-pressure water to the four rotating jets in the rear of the head and one in front. These rotating jets create an extremely powerful 360 degree all around complete cleaning of the pipe, flushing, and removing debris in less passes. The offset front jet eliminates blockages easily and effectively.

A case kit is available which includes an additional skid for each size.

^{*5015} Baby-Gator nozzle is only available in the case kit on page 38.

GATOR CASE KITS















	Hose Con. Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Head	# Tier
5015*	CASE KIT 3/8"							
5025	CASE KIT ½"							
5035	CASE KIT 1"							

High Performance Rotating Nozzle

The **Gator** nozzles cut and remove roots, grease, blockages, and scale in various pipes: **Baby-Gator** and **Mini-Gator** ranging from 3" – 8" and **Gator** ranging from 6" – 24". Encased in a compact stainless-steel body the strong reinforced internal design rotates the head. 3D fluid mechanics in the head smoothly direct all the incoming high-pressure water to the four rotating jets in the rear of the head and one in front. These rotating jets create an extremely powerful 360 degree all around complete cleaning of the pipe, flushing, and removing debris in less passes. The offset front jet eliminates blockages easily and effectively. The case kit includes an additional skid for each size.

^{*5015} Baby-Gator nozzle is only available in the case kit.

MINI T-CUTTERS





	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	S Turbine Jets	# Tier
1978	1/2"	8	2" - 4"	4.13" x 1.65"	1.54	6	3	2
1979	1/2"	8	2" - 4"	3.38" x 1.37"	0.88	6	3	2
1995	1/2"	8	2" - 4"	3.07" x 1.37"	0.88	6	3	2
1996	1/2"	8	2" - 4"	3.93" x 1.65"	1.32	6	3	2

Mini turbine tools perfect for slight bends and lower pump outputs

Made from hardened stainless steel and designed for small pipes, **Mini T-Cutters** are high-efficiency turbine tools that effectively remove roots and deposits and open blockages. Their small size enables the Mini T Cutters to navigate around slight bends. Most uniquely, the cutters can be reduced to 3/8 " and 1/4" for lower pump outputs.

TURBO® 0





A small chain cutter with multiple attachments

One of the smallest chain cutters offered by USB-USA, the **Turbo® 0** utilizes turbine technology and 3D fluid mechanics to deliver supreme cutting and cleaning power. Multiple chain attachments, and rigid guide skids 4" to 6" make the removal of roots, grease and mineral deposits much easier. This cutter is constructed from hardened stainless steel, comes standard with one-piece ceramic nozzle inserts and is capable of use with recycled water.

	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Turbine Jets	# Tier
2000	1/2"	12	4" - 6"	3.39" x 1.96"	0,88	3	3	3

TURBO® 0 - SPECIAL CASE



2050 Turbo® O CASE KIT Includes: 4" Guide Skid 4" Chain retainer w/ chain and bits 6" Guide Skid 6" Chain retainer w/ chain and bits Tools for cutter

TURBO® 0 - ACCESSORIES





2001 Guide skid 4"2003 Guide skid 6"



2010M Chain retainer w/ chain and bits 4"
2012M Chain retainer w/ chain

and bits 6"



2010S Chain w/ blocks 4"
2012S Chain w/ blocks 6"



2035 Slide-thru chain retainer



2038 Block for chain



2020 4ft Replacement chain

TURBO® I





Outmatched cutting performance with 4"-6" rigid skids*

The **Turbo® I** rigid chain cutter was engineered to be powerful, durable, user friendly and require low maintenance. This cutter uses turbine technology in combination with 3D fluid mechanics to deliver outmatched cutting performance in its operating range. Roots, grease and mineral deposits do not stand a chance against the Turbo® I. Rigid guide skids are available from 4" to 6". The cutter comes standard with one-piece ceramic inserts and a high-pressure swivel and is capable of use with recycled water.

*Skids sold separately

	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	S Turbine Jets	# Tier
2100	1/2", 3/4"	14	4" - 6" ****	5.51" x 2.36"	2,64	3	3	3

TURBO® I - SPECIAL CASE



2150	Turbo® I CASE KIT Includes: 4" Guide Skid 4" Chain retainer w/ chain and bits 6" Guide Skid 6" Chain retainer w/ chain and bits Tools for cutter

TURBO® I - ACCESSORIES



2101	Guide skid 4"
2103	Guide skid 6"



2110M	Chain retainer w/ chain and bits 4"
2112M	Chain retainer w/ chain and bits 6"



2110S	Chain w/ blocks 4"
21128	Chain w/blocks 6"



2136 Slide-thru chain retainer



2138 Block for chain



2120 4ft Replacement chain



2160	Diamond face cutter 4"
2164	Diamond face cutter 6"



2168 Center cap for face cutter




2170	Diamond barrel cutter 4"
2172	Diamond barrel cutter 5"
2175	Cap for barrel

TURBO® II RIGID





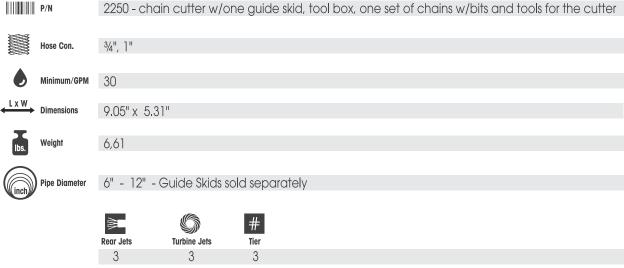

Outmatched cutting performance with 6"-12" rigid skids

The **Turbo® II Rigid** chain cutter was engineered to be powerful, durable, user friendly and require low maintenance. This cutter uses turbine technology in combination with 3D fluid mechanics to deliver outmatched cutting performance in its operating range. Roots, grease, and mineral deposits do not stand a chance against the Turbo® II. Rigid guide skids are available from 6" - 12". The cutter comes standard with one-piece ceramic inserts and a high-pressure swivel and is capable of use with recycled water.

TURBO® II RIGID - ACCESSORIES



2251	Guide skid 6"	
2252	Guide skid 8"	
2253	Guide skid 10"	
2254	Guide skid 12"	



2210M	3 Piece set of chain w/bits 6"
2211M	3 Piece set of chain w/bits 8"
2212M	3 Piece set of chain w/bits 10"
2213M	3 Piece set of chain w/bits 12"



2210S	3 Piece set of chain w/T-Hammer bits 6"
2211S	3 Piece set of chain w/T-Hammer bits 8"
2212S	3 Piece set of chain w/T-Hammer bits 10"
2213\$	3 Piece set of chain w/T-Hammer bits 12"



2238	T-Hammer bit



2210D	3 Piece set of chain w/diamond bits 6"
2211D	3 Piece set of chain w/diamond bits 8"
2212D	3 Piece set of chain w/diamond bits 10"
2213D	3 Piece set of chain w/diamond bits 12"



2220	6ft Replacement chain
2220	on Replacement Chain




9005-TII	Quick change chain retainer	
	Caron Gran Garage	

TURBO® II





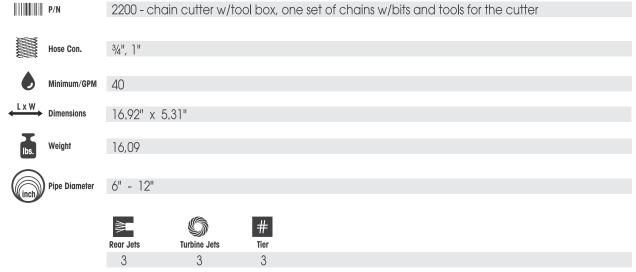

An impressive cutter with flexible guide skid (6" - 12")

The **Turbo® II** flexible chain cutter was engineered to be powerful, durable, user friendly and require low maintenance. Made from high quality stainless steel and aluminum, this cutter uses turbine technology in combination with 3D fluid mechanics to deliver outmatched cutting performance in its operating range. Roots, grease, mineral deposits and protruding taps don't stand a chance against this impressive cutter. The flexible guide skid is adjustable between 6"-12" within 1/16", making it capable of handling offsets in the pipe. The cutter comes standard with one-piece ceramic inserts, a high-pressure swivel and is capable of use with recycled water.

TURBO® II - ACCESSORIES

ade ade ade	2210M 2211M 2212M 2213M	3 Piece set of chain w/ bits 6" 3 Piece set of chain w/ bits 8" 3 Piece set of chain w/ bits 10" 3 Piece set of chain w/ bits 12"
	2210S 2211S 2212S 2213S	3 Piece set of chain w/ T-Hammer bits 6" 3 Piece set of chain w/ T-Hammer bits 8" 3 Piece set of chain w/ T-Hammer bits 10" 3 Piece set of chain w/ T-Hammer bits 12"
	2210D 2211D 2212D 2213D	3 Piece set of chain w/ diamond bits 6" 3 Piece set of chain w/ diamond bits 8" 3 Piece set of chain w/ diamond bits 10" 3 Piece set of chain w/ diamond bits 12"
A	2220	6ft Replacement chain
THE PERSON NAMED IN	9000-TII	Slide-thru chain retainer
	2260 2262	Diamond face cutter 6" Diamond face cutter 8"
	2265 2268	Center cap for face cutter 6" Center cap for face cutter 8"
3	2270 2272 2275	Diamond tap cutter 6" Diamond tap cutter 8" Cap for barrel
*	2295	Pulling eye swivel
	9005-TII	Quick change chain retainer

TURBO® \$400







A heavy-duty cutter that leaves nothing in its path (flexible guide skid 8" - 16")

The **Turbo® \$400** flexible chain cutter was engineered to be powerful, durable, user friendly and require low maintenance. Made from high quality stainless steel and aluminum, this heavy-duty cutter uses turbine technology in combination with 3D fluid mechanics to deliver outmatched cutting performance in its operating range. Roots, grease, mineral deposits and protruding taps don't stand a chance against this impressive cutter. The flexible guide skid is adjustable between 8" - 16" within 1/16", making it capable of handling offsets in the pipe. An extension kit increases the cutters operation up to 24". The cutter comes standard with one-piece ceramic inserts and a high-pressure swivel and is capable of use with recycled water.

TURBO® \$400 - ACCESSORIES



2510M	3 Piece set of chain w/ bits 8"
2511M	3 Piece set of chain w/ bits 10"
2512M	3 Piece set of chain w/ bits 12"
2513M	3 Piece set of chain w/ bits 15"
2514M	3 Piece set of chain w/ bits 18"
2515M	3 Piece set of chain w/ bits 21"
2516M	3 Piece set of chain w/ bits 24"



2510D	3 Piece set of chain w/ diamond bits 8"
2511D	3 Piece set of chain w/ diamond bits 10"
2512D	3 Piece set of chain w/ diamond bits 12"
2513D	3 Piece set of chain w/ diamond bits 15"
2514D	3 Piece set of chain w/ diamond bits 18"
2515D	3 Piece set of chain w/ diamond bits 21"
2516D	3 Piece set of chain w/ diamond bits 24"



2510S	3 Piece set of chain w/ T-Hammer bits 8"
2511S	3 Piece set of chain w/ T-Hammer bits 10"
2512S	3 Piece set of chain w/ T-Hammer bits 12"
2513S	3 Piece set of chain w/ T-Hammer bits 15"
2514S	3 Piece set of chain w/ T-Hammer bits 18"
2515S	3 Piece set of chain w/ T-Hammer bits 21"
2516S	3 Piece set of chain w/ T-Hammer bits 24"



2538 T-Hammer bit



9002-TS400 Slide thru chain retainer



2520 6ft Replacement chain



2548 Puling eye swivel



9005-T\$400 Quick change chain retainer




2571 Diamond tap cutter 8"2572 Diamond tap cutter 10"2573 Diamond tap cutter 12"

TURBO® III





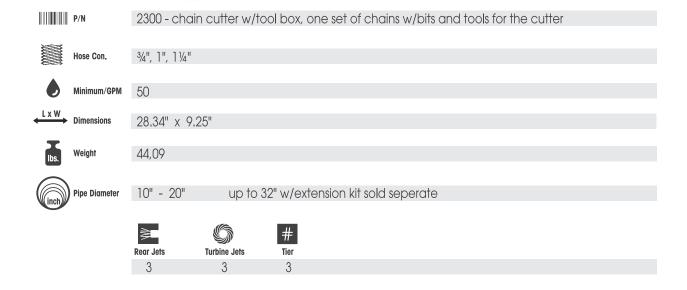

A heavy-duty cutter that leaves nothing in its path (flexible guide skid 10" - 20")

The **Turbo® III** flexible chain cutter was engineered to be powerful, durable, user friendly and require low maintenance. Made from high quality stainless steel and aluminum, this heavy-duty cutter uses turbine technology in combination with 3D fluid mechanics to deliver outmatched cutting performance in its operating range. Roots, grease, mineral deposits and protruding taps do not stand a chance against this impressive cutter. The flexible guide skid is adjustable between 10" - 20" within 1/16", making it capable of handling offsets in the pipe. An extension kit increases the cutters operation up to 32". The cutter comes standard with one-piece ceramic inserts and a high-pressure swivel and is capable of use with recycled water.

TURBO® III - ACCESSORIES

AND THE SALE

2310M	3 Piece set of chain w/bits 10"
2311M	3 Piece set of chain w/bits 12"
2312M	3 Piece set of chain w/bits 15"
2313M	3 Piece set of chain w/bits 18"
2314M	3 Piece set of chain w/bits 20"
2315M	6 Piece set of chain w/bits 24"
2316M	6 Piece set of chain w/bits 28"
2317M	6 Piece set of chain w/bits 30"
2318M	6 Piece set of chain w/bits 32"



2310D	3 Piece set of chain w/diamond bits 10"
2311D	3 Piece set of chain w/diamond bits 12"
2312D	3 Piece set of chain w/diamond bits 15"
2313D	3 Piece set of chain w/diamond bits 18"
2314D	3 Piece set of chain w/diamond bits 20"
2315D	3 Piece set of chain w/diamond bits 24"
2316D	3 Piece set of chain w/diamond bits 28"
2317D	3 Piece set of chain w/diamond bits 30"
2318D	3 Piece set of chain w/diamond bits 32"



2310S	3 Piece set of chain w/T-Hammer bits 10"
2311\$	3 Piece set of chain w/T-Hammer bits 12"
2312S	3 Piece set of chain w/T-Hammer bits 15"
2313\$	3 Piece set of chain w/T-Hammer bits 18"
2314\$	3 Piece set of chain w/T-Hammer bits 20"
2315\$	3 Piece set of chain w/T-Hammer bits 24"
2316\$	3 Piece set of chain w/T-Hammer bits 28"
2317\$	3 Piece set of chain w/T-Hammer bits 30"
2318\$	3 Piece set of chain w/T-Hammer bits 32"



2336	Slide -thru	chain	retainer



2320	6ft Replacement chain 16B
2330	6ft Replacement chain 12B



2604	Extension skids up to 32"
2370	Extension skids for Egg Shaped Pipe



2362	Chain retainer wheel small w/6 tabs
	for 12B and 16B up to 32"



2344	Diamond tap cutter 10"
2345	Diamond tap cutter 12"
2346	Cap for barrel cutter

TURBO® S200





P/N	2750 - chain cutter w/tool box and one set of chains w/bits and tools for the cutter
Hose Con.	1", 11/4"
Minimum/GPM	80
LxW	
Dimensions	29.52" x 10.23"
T	
lbs. Weight	77,16
Pipe Diameter	8"-15"
IIICII	
	≱ ■
	Rear Jets Turbine Jets Tier
	3 6 3
	3

A heavy-duty cutter that leaves nothing in its path (flexible guide skid 8"-15")

The **Turbo® \$200** flexible chain cutter was engineered to be powerful, durable, user friendly and require low maintenance. Made from tempered stainless steel and aluminum, this heavy-duty cutter uses turbine technology in combination with 3D fluid mechanics to deliver outmatched cutting performance in its operating range. Roots, grease, mineral deposits and protruding taps do not stand a chance against this impressive cutter. The flexible guide skid is adjustable between 8" - 15" within 1/16" making it capable of handling offsets in the pipe. The cutter comes standard with one-piece ceramic inserts, a high-pressure swivel and is capable of being used with recycled water.

TURBO® S200 - ACCESSORIES

	2751M 2752M 2753M 2754M	3 Piece set of chain w/bit 8" 3 Piece set of chain w/bit 10" 3 Piece set of chain w/bit 12" 3 Piece set of chain w/bit 15"
	2755\$ 2756\$ 2757\$ 2758\$	3 Piece set of chain w/blocks 8" 3 Piece set of chain w/blocks 10" 3 Piece set of chain w/blocks 12" 3 Piece set of chain w/blocks 15"
	2759D 2760D 2761D 2762D	3 Piece set of chain w/diamond bits 8" 3 Piece set of chain w/diamond bits 10" 3 Piece set of chain w/diamond bits 12" 3 Piece set of chain w/diamond bits 15"
	2720	6ft Replacement chain
	9002-T\$200	Slide thru chain retainer
0	2738	Block for chain
	2740	Hex Bit (outside link)
	2741	Hex Bit (inside link)
9	2739	Diamond bit
	0005 70000	Quiels change chair setaines
	9005-TS200	Quick change chain retainer
	2798	Pulling eye swivel

TURBO® S600





A heavy-duty cutter that leaves nothing in its path (flexible guide skid 12" - 24")

The **Turbo® \$600** flexible chain cutter was engineered to be powerful, durable, user friendly and require low maintenance. Made from high quality stainless steel and aluminum, this heavy-duty cutter uses turbine technology in combination with 3D fluid mechanics to deliver outmatched cutting performance in its operating range. Roots, grease, mineral deposits and protruding taps do not stand a chance against this impressive cutter. The flexible guide skid is adjustable between 12" - 24" within 1/16", making it capable of handling offsets in the pipe. The cutter comes standard with one-piece ceramic inserts, a high-pressure swivel and is capable of being used with recycled water.

TURBO® S600 - ACCESSORIES



2610M	3 Piece set of chain w/bits 12"
2611M	3 Piece set of chain w/bits 15"
2612M	3 Piece set of chain w/bits 18"
2613M	3 Piece set of chain w/bits 20"
3614M	3 Piece set of chain w/bits 24"



3 Piece set of chain w/blocks 12"
3 Piece set of chain w/blocks 15"
3 Piece set of chain w/blocks 18"
3 Piece set of chain w/blocks 20"
3 Piece set of chain w/blocks 24"



2610D	3 Piece set of chain w/diamond bits 12"
2611D	3 Piece set of chain w/diamond bits 15"
2612D	3 Piece set of chain w/diamond bits 18"
2613D	3 Piece set of chain w/diamond bits 20"
2614D	3 Piece set of chain w/diamond bits 24"



2620 6ft Replacement chain



9002-TS600 Slide thru chain retainer



2638 Block for chain



2639 Diamond bit



9005-TS600 Quick change chain retainer




2698 Pulling eye swivel

TURBO® IV





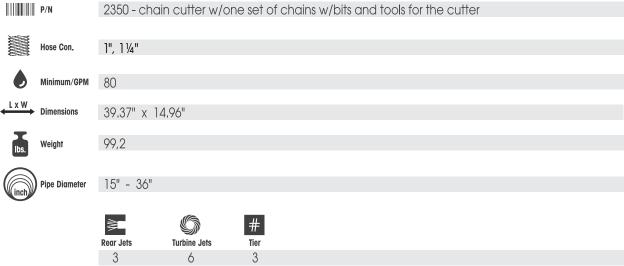

A heavy-duty cutter that leaves nothing in its path (flexible guide skid 15" - 36")

The **Turbo® IV** flexible chain cutter was engineered to be powerful, durable, user friendly and require low maintenance. Made from tempered stainless steel and aluminum, this heavy-duty cutter uses turbine technology in combination with 3D fluid mechanics to deliver outmatched cutting performance in its operating range. Roots, grease, mineral deposits and protruding taps do not stand a chance against this impressive cutter. The flexible guide skid is adjustable between 15" - 36" within 1/16" making it capable of handling offsets in the pipe. An extension kit increases the cutters operation up to 48". The cutter comes standard with one-piece ceramic inserts and a high-pressure swivel and is capable of use with recycled water.

TURBO® IV - ACCESSORIES

	2354M 2355M 2356M 2357M 2358M 2359M	3 Piece set of chain w/bits 15" 3 Piece set of chain w/bits 18" 3 Piece set of chain w/bits 20" 6 Piece set of chain w/bits 24" 6 Piece set of chain w/bits 28" 6 Piece set of chain w/bits 30"
	2360M 2361M	6 Piece set of chain w/bits 32" 6 Piece set of chain w/bits 36"
	2354D 2355D 2356D 2357D 2358D 2359D 2360D 2361D	3 Piece set of chain w/diamond bits 15" 3 Piece set of chain w/diamond bits 18" 3 Piece set of chain w/diamond bits 20" 3 Piece set of chain w/diamond bits 24" 3 Piece set of chain w/diamond bits 28" 3 Piece set of chain w/diamond bits 30" 3 Piece set of chain w/diamond bits 32" 3 Piece set of chain w/diamond bits 36"
De.	2338	Block for chain
0	2000	BIOCK TOT CITAIN
•	2339	Diamond bits
	2320	6ft Replacement chain
and the same		
And the second	2362M	Chain retainer wheel large w/6 tabs for 12B and 16B up to 36"
	2364\$	Chain retainer wheel large w/6 tabs for 12B up to 48"
	2398	Pulling eye swivel
	2070	I diming by booking of

TURBIKIT 3D





	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	S Turbine Jets	# Tier
2400	1/2", 3/4", 1"	14	4" - 8"	5.90" x 2.36"	3,3	6	3	2
2410	6ft Replace	ement chain						
2411	3 Piece set	of chains x 7	links 4"					
2411D	3 Piece set o	of chain w/dian	nond bits 4"					
2412	2 Piece set	of chains x 9	links 6"					
2412D	3 Piece set o	of chain w/dian	nond bits 6"					
2413	3 Piece set	of chains x 1	1 links 8"					
2413D	3 Piece set o	of chain w/dian	nond bits 8"					
2420	Replaceme	ent screws Má						

High strength open-link chain

Open-link chain makes the **Turbikit 3D** unique from other chain cutters offered by USB-USA. Driven by a turbine technology, the high strength open link chain delivers extremely effective cutting power. The cutter can be used to remove roots and mineral deposits from the sewer pipe without a centralizing skid. The cutter comes standard with one-piece ceramic inserts and a high-pressure swivel and is capable of use with recycled water.

PIPE WOLF NOZZLE 3D



















	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Turbine Jets	# Tier
1984	1", 1¼"	80	8" - 24"	7.48" x 3.74"	11,9	6	3	3
1982]"	60	6" - 15"	6.29" x 2.83"	5,73	6	3	3
1982,75	3/4"	30	6" - 12"	6.29" x 2.83"	5,73	6	3	3
1980	1/2"	12	Δ" - 8"	456" x 212"	2 42	6	3	3

A beast for organic blockages

The **Pipe Wolf Nozzle 3D** is an extremely aggressive specialty tool perfect for total blockages that are made from organic material. A hardened, tapered head with sharp edges utilizes turbine technology and spins at approximately 10,000 rpms, boring a hole and opening up the blockage. This essential nozzle comes standard with one-piece ceramic inserts, can be used with recycled water and delivers in emergency situations.

DIAMOND FACE CUTTER 3D























	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Turbine Jets	# Tier
2453	1", 1¼"	80	6" - 10"	5.74" x 3.74"	11,24	6	3	3
2452	1"	60	6" - 8"	4.92" x 2.87"	5,29	6	3	3
2451	3/4"	30	6" - 8"	4.92" x 2.87"	5,29	6	3	3
2450	1/2"	14	4" - 6"	3.85" x 2.24"	2.42	6	3	3

1986	Replacement head for Diamond Cutter No. 2450
1987	Replacement head for Diamond Cutter No. 2451 and 2452
1988	Replacement head for Diamond Cutter No. 2453

An aggressive tool for total blockages and mineral deposits

The **Diamond Face Cutter 3D** is an extremely aggressive specialty tool perfect for total blockages and some hardened mineral deposits. Turbine technology and 3D fluid mechanics spin a cutting head equipped with diamond bits and sharp edges at approximately I 0,000 rpms, boring a hole and opening the blockage. This nozzle comes standard with one-piece ceramic inserts and can be used with recycled water.

ROTOR WOLF









	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
1974	1/2"	12	4" - 6"	3.70" x 1.57"	0,88	3		3	2
1975	1/4"	8	1" - 2"	2.75" x 1.18"	0,44	3		3	2
1976	3/8"	8	2" - 4"	2.75" x 1.18"	0,44	3		3	2
1977	1/4"	6	1" - 2"	1.65" x 0.78"	< .22	3		3	1

Two nozzles in one to pierce and penetrate blockages

USB-USA combined two nozzles to create the **Rotor Wolf**! Designed for use in smaller pipes, the hardened tapered head with sharp edges effectively pierces and penetrates blockages fast. The middle 90° rotating jets spin the head as they clean the interior walls of the pipe.

BEAVER

















	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	S Turbine Jets	Radial Jets	# Tier
2475	1/2"	12	4"	3.74 x 2.95"	3,00	6	3		3
2485	1/2"	12	4"	3.74 x 2.95"	3,00	6	3		3

High efficiency cutter in a compact design

The **Beaver** nozzle is a small maneuverable cutting head for removing roots and mineral deposits from pipes. A quick-change system for the rotating heads allows the user to easily change between the standard cutting head or the diamond cutting head. The 3D fluid mechanics and turbine technology propel and spin the head aggressively to open blockages. Once-piece ceramic inserts come standard and the nozzle can be used with recycled water.

RADIAL FLEX SKID















	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
5250	1", 1¼"	80	20" - 48"	38.18" x 18.5"	72,75	3		4	2
5070	1" Noz	zle extension							
5072	2" Noz	zle extension							
5074	4" Noz	zle extension							

Tackle large diameter pipes

The **Radial Flex Skid** is a controlled rotating nozzle with flexible guide skid for large diameter pipes of up to 48". The 360° cleaning thoroughly removes hardened grease and some mineral deposits from the top of the pipe. Constructed from high quality stainless steel and aluminum, this flexible skid is adjustable within 1/16", very user friendly and can be used with recycled water.

HANDY CART

















P/N	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
2550	1", 1¼"	80	40" and up	39.37" x 16.53"	88,18	5	6	4	2
5070	1" Noz	zle extension							
5072	2" Noz	zle extension							
0072	2 1102	ZIE EXTELISION							
5074	4" Noz	zle extension							

Powerful cleaning for rectangular or large diameter pipes

The Handy Cart includes a controlled rotating nozzle with a robust transporter skid for various rectangular or large diameter pipes of up to 16 feet! The 360° cleaning thoroughly removes hardened grease and some mineral deposits from the top of the pipe. Constructed from high quality stainless steel this Handy Cart is very user friendly and ready for immediate use.

EIBOW FLEX SKID















	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
2555	1", 1¼"	80	24" - 72"	_	55,11	5		4	2
5070	1" Noz	zle extension							
5072	2" Noz	zle extension							
5074	4" Noz	zle extension							

Powerful cleaning for large egg-shaped pipes

The **Eibow Flex Skid** offers a controlled rotating nozzle with flexible guide skid for large egg-shaped pipes up to 72". The 360° cleaning thoroughly removes hardened grease and some mineral deposits from the top of pipes. The start-of-the-art flexible skid is adjustable within 1/16", very user friendly and can be used with recycled water.

NOZZCAM™ 3D





	Hose Con.	Minimum/GPM	Pipe Diameter	L x W x H Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier	
3330	3/8 - 1/2"	9	3" - 6"	12.54" x 12.99 x 15.74"	16.53	5		2	3	

Innovative inspection nozzle

The **NOZZCAM™** is a steering nozzle with a built-in CCTV camera and display that provides exceptionally clear imagery and extreme maneuverability in any size pipe. It's fixed (non-leveling) camera allows operators to know their place in the pipe and easily steer down laterals. With an additional light package and flexible guide skid the NOZZCAM™ can be used in larger pipe for mainline inspection.

SPIN-JET





	Hose Con.	Minimum/GPM	l Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
5050	1/2", 1"	12	Man Hole or Lift Station 4'-15'	6.29" x 9.84"	4,85		3	3	2
5052	3/4"	30	Man Hole or Lift Station 4'-15'	6.29" x 11.02"	7,05		3	6	2
5055]"	60	Man Hole or Lift Station 4'-15'	9.44" x 11.81"	12,34		3	3	2
5058	Center	ing Aid	5050 5052						
5059	Center	ing Aid	5055						
5070	Nozzle	Extension	1"						
5072	Nozzle	Extension	2"						
5074	Nozzle	Extension	4"						

A controlled, rotating nozzle for cleaning lift stations, barrels and manholes

The **Spin-Jet** is a self-centering, controlled rotating nozzle that is used for cleaning lift stations, barrels and manholes prior to rehabilitation. Available in three different versions, the Spin-Jet has driving nozzles that rotate in a 360° horizontal plane only. This action eliminates the need to cover the manhole during operation, allowing for constant viewing of the cleaning process. Front jets thoroughly clean any grease, sludge or mud at the bottom.

STEERING NOZZLE





	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
1239	Replac	cement Hose	with Threaded	Ends					
1240	1/2"	12	3" - 8"	10.62" x 1.25"	0,22	4	4		2
1241	1/2"	12	3" - 8"	9.05" x 1.25"	0,55	6	4		2
1243	1/2"	12	3" - 8"	9.44" x 1.57"	0,99	6	4		2
1245	1/2"	12	3" - 8"	9.84" x 1.57"	1,54	3	4	3	2
1246	1/2"	12	3" - 8"	9.84" x 1.57"	1,43	3	4	3	2

A nozzle for navigating

As the name suggest, the **Steering Nozzle** can be navigated into and through laterals and other branches. Simply twist your high-pressure hose to the left or right to direct the nozzle exactly where you want it to go.

ANTIBLASTER





	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
1198]"	60	6" - 12"	4.52" x 2.75"	3,74	8	1		3
1198,75	3/4"	30	6" - 10"	4.52" x 2.75"	3,74	8	1		3
1199]"	80	6" - 12"	4.52" x 2.75"	3,74	8	1	8	3
1200]"	80	8" - 15"	5.90" x 3.93"	10,58	6		6	3

Smooth propulsion for shallow depths and pipes near homes

With a wide 35 and 70 degree spray angles, the **Antiblaster** nozzle is perfect for reducing the chances of blowing toilets. Constructed from hardened stainless steel, the nozzle was designed for cleaning pipes at a shallow depths and pipes that are adjacent to homes. The 3D fluid mechanics and one-piece ceramic inserts provide powerful cleaning and smooth propulsion. An optional front jet is also available.

OVERSIZED NOZZLES















	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets	# Tier
1010	1½"	120	40" - 196"	32.28 x 17.32"	167	14			3
1030	1½"	100	12" - 78"	16.53 x 7.48"	105	8			3
1191	1½"	100	12" - 24"	12.40 x 7.48"	79	6		10	3
1227	1½"	100	15" - 120"	10.23 x 6.29"	79	15			3

Special applications require special tools

Oversized nozzles are larger and heavier than ordinary cleaning nozzles. These nozzles are mainly used in conjunction with high water volumes and large hose diameters in big sewer lines. With 120 - 210 GPM and high-pressure hose $1 \frac{1}{2}$ ", deposits can be loosened and transported in these, constantly water bearing sewers. Due to their mass, the oversized nozzles will stay on the bottom of the sewer and never float. These nozzles come with one-piece ceramic inserts.

HIGH PRESSURE SWIVEL



	Hose Con.	
1650	1¼"	Swivel Joint male/female
1651	1"	Swivel Joint male/female
1652	3/4"	Swivel Joint male/female
1653	1/2"	Swivel Joint male/female

Keep nozzles stationary

High Pressure Swivels are made from hardened stainless steel and allow for the hose to twist and swivel without turning what's connected to it while in use. High-pressure swivels are made for chain cutters, bottom cleaners and nozzles.

CROWN NOZZLE





	Hose Con.	Jets	Suction Pipe Diameter
2730	1/2"	6	2.95/3.14"
2732	1/2"	6	3,93/4,33"
2734	1/2"	6	4.92/5.31"
2736	3/4	6	5.9"

The crown jewel of hydro-excavation

The **Crown Nozzle** can be easily attached to the suction tube for hydro-excavation. Six powerful jets loosen and break up material, which can then be effortlessly transported to the debris tank. The crown is constructed of hardened stainless steel and has replaceable one-piece ceramic jets.

UNI-FLEX SKID

















	Hose Con.	Minimum/GPM	Pipe Diameter	L x W Dimensions	lbs. Weight	Rear Jets	Front Jets	Radial Jets
2602]"	N/A	10" - 20"	25,59" x 9,25"	33,06	3		
2601]"	N/A	6" - 12"	15.74" x 5.31"	15,43	3		

Adjustable and accommodating

Used for centralization in the pipe, the **Uni-Flex Skid** is continuously adjustable by increments of 1/16" within its operating range. The front 1" NPT threads accommodate most cleaning, rotor and radial cleaning nozzles. The universal flex skid comes standard with a high-pressure swivel.

REDUCERS | COLLARS

ENLARGING COLLAR - STAINLESS STEEL

1810	1" male	Χ	1¼" female
1811	¾" male	Χ	1" female
1812	½" male	Χ	¾" female
1813	%" male	Χ	½" female
1814	¼" male	Χ	½" female

REDUCER - STAINLESS STEEL

1820	1¼" male	Χ	1" female
1821	1" male	Χ	¾" female
1822	¾" male	Χ	½" female
1823	½" male	Χ	%" female
1824	%" male	Χ	¼" female

DOUBLE NIPPLE - GALVANIZED

1830	1¼" male	Χ	1¼" male
1831	1¼" male	Χ	1" male
1832	1" male	Χ	1" male
1833	1" male	Χ	¾" male
1834	¾" male	Χ	¾" male
1835	¾" male	Χ	½" male
1836	½" male	Χ	½" male
1837	½" male	Χ	%" male
1838	¾" male	Χ	¼" male
1839	¼" male	Χ	¼" male
1840	¼" male	Χ	1/8" male
1841	1/8" male	Χ	%"male

STRAIGHT COLLARS - STAINLESS STEEL

1850	1¼" male	Χ	1¼" female
1851	1" male	Χ	1" female
1852	¾" male	Χ	¾" female
1853	½" male	Χ	½" female
1854	%" male	Χ	%" female
1855	¼" male	Χ	¼" female

FEMALE TO FEMALE FITTING - GALVANIZED

			用	
1860	1¼" female	Χ	14" female	
1861	1" female	Χ	1" female	
1862	¾" female	Χ	¾" female	
1863	½" female	Χ	½" female	
1864	%" female	Χ	%" female	
1865	¼" female	Χ	¼" female	

SWIVEL FITTING - GALVANIZED

1870	14" male	Χ	14" female
1871	1¼" male	Χ	1" female
1872	1" male	Χ	1" female
1873	1" male	Χ	¾" female
1874	¾" male	Χ	¾" female
1875	¾" male	Χ	½" female
1876	½" male	Χ	½" female
1877	½" male	Χ	%" female
1878	%" male	Χ	%" female
1879	%" male	Χ	¼" female
1880	¼" male	Χ	¼" female

TOOLS | ACCESSORIES

INSERT GAUGE



8000	0.45 - 1.5	
8001	1.5 - 3.0	

T-HANDLE WRENCH FOR ISK INSERTS

8010	2,0	
8011	2,5	
8012	3,0	
8013	4,0	
8014	5,0	
8014	6,0	
8016	8,0	

T-HANDLE WRENCH FOR ASK INSERTS

8020	SW6	
8021	SW8	
8022	SW9	
8023	SW10	
8024	SW12	
8025	SW14	
8026	SW17	

AKTIVATOR

Aktivator 200 ML



NOZZLE ADHESIVE

8055	Medium strength, blue 50 ml
8057	High strength, green 50 ml

ALLEN WRENCH

8040	2,0	
8041	2,5	
8042	3,0	
8043	4,0	
8044	5,0	
8045	6,0	

PUNCH FOR TURBOS

8065	4,0	
8067	5,0	
8069	6,0	
8070	8,0	
8072	10,0	

TEFLON

8080 Teflon 1 I



TEFLONSPRAY

8082	Teflonspray 500 ml
8085	Teflonspray FIN SUPER 100 ml

CARE SPRAY

8095	Care spray 500 ml

NOZZLE INSERTS















		wrench size	
1561	G ¼"	SW 14	
1563	M 10 x 1	SW 10	
1564	G1/8"	SW 14	
1567	M6	SW 6	
1568	M8	SW 8	

		wrench size
1550	G ¼"	SW 14
1551	G ¼"	SW 9
1563 K	M 10 x 1	SW 10
1564 K	G1/8"	SW 14
1527 AK	M6	SW 6
1528 AK	M8	SW 8

1532	M 12	
1528	M 8	
1527	M 6	
1526	M 5	
1525	M 4	

1552	M 12		
1529 K	M 10		
1528 K	M 8		
1527 K	M 6		

1572	G ¼"	
1576	G ¼"	

		wrench size	
1573 K	G ¼"	SW 14	
1574 K	G1/8"	SW 14	
1575 K	M 10 x 1	SW 10	

WARRANTY

Thank you for your interest in the products and services of USB-USA LLC. This limited warranty applies to physical goods, and only for physical goods, purchased from USB-USA LLC.

What does this limited warranty cover?

This limited warranty covers any manufacturer's defect in material or workmanship under normal use during the warranty period.

During the warranty period, USB-USA LLC will repair or replace, at no charge, products or parts of a product that proves defective because of improper material or workmanship, under normal use and maintenance.

What will we do to correct problems?

USB-USA LLC will repair the product at no charge, using new or refurbished replacement parts. If necessary full replacement is offered.

How long does the coverage last?

The warranty period for physical goods purchased from USB-USA LLC is one year for any physical nozzle or chain cutter that spins (Turbo Chain Cutter, Rotors, Primus etc.) and three years for any nozzle with ceramic nozzle inserts and 3D fluid mechanics from the date of purchase.

A replacement physical good or part assumes the remaining warranty of the original physical good or 90 days from the date of replacement or repair, whichever is longer.

What does this limited warranty not cover?

This limited warranty does not cover any problem that is caused by conditions, malfunctions or damage not resulting from defects in material or workmanship.

What do you have to do?

To obtain warranty service, you must first contact us to determine the problem and most appropriate solution for you.

NOTES



